


### Entry Door Heights

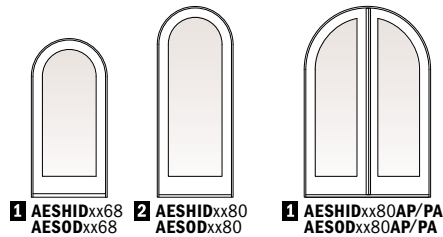

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels, see page 192. Stationary single (S) or stationary two panel (SS) doors are also available (i.e. AESHID3068S or AESOD4080SS).

### Springline™ Inswing Entry Door Dimensions and Specifications

Door Number	Door Dimensions				Min. Rough Opening			Clear Opening Sq. Ft./m <sup>2</sup>	Clear Opening Maximums			Vent Sq. Ft./m <sup>2</sup>	Overall Door Area Sq. Ft./m <sup>2</sup>
	Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	90° Width Inches/(mm)		Full Width Inches/(mm)	Height Inches/(mm)			
3068	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	14.92 (1.39)	32 13/16" (833)	34 7/8" (886)	61 5/8" (1565)	18.25 (1.70)	20.41 (1.90)	
3668	21 1/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.64 (1.55)	38 13/16" (986)	40 7/8" (1038)	58 5/8" (1489)	21.21 (1.97)	23.46 (2.18)	
3080	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.07 (1.68)	32 13/16" (833)	34 7/8" (886)	74 5/8" (1895)	21.40 (1.99)	23.81 (2.21)	
3680	21 1/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.33 (1.89)	38 13/16" (986)	40 7/8" (1038)	71 5/8" (1819)	24.90 (2.31)	27.40 (2.55)	
4080AP/PA	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.68 (2.11)	43 13/16" (1113)	47 15/16" (1218)	68 1/8" (1730)	28.95 (2.69)	31.56 (2.93)	
4080AP/PA*	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.85 (1.01)	20 7/8" (530)	22 15/16" (583)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)	
5080AP/PA	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.86 (2.40)	55 13/16" (1418)	59 15/16" (1522)	62 1/8" (1578)	35.66 (3.31)	38.46 (3.57)	
5080AP/PA*	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.48 (1.16)	26 7/8" (683)	28 15/16" (735)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)	
5480AP/PA	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.70 (2.48)	59 13/16" (1519)	63 15/16" (1624)	60 1/8" (1527)	37.85 (3.52)	40.72 (3.78)	
5480AP/PA*	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.92 (1.20)	28 7/8" (733)	30 15/16" (786)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)	
6080AP/PA	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.04 (2.60)	67 13/16" (1722)	71 15/16" (1827)	56 1/8" (1426)	42.15 (3.92)	45.15 (4.19)	
6080AP/PA*	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.62 (1.27)	32 7/8" (835)	34 15/16" (887)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)	
7080AP/PA	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.22 (2.71)	79 13/16" (2027)	83 15/16" (2132)	50 1/8" (1273)	48.43 (4.50)	51.62 (4.80)	
7080AP/PA*	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.25 (1.32)	38 7/8" (987)	40 15/16" (1040)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)	

- To complete door identification, add AESHID to "Door Number" listed in table (i.e. AESHID3068 or AESHID4080PA).
- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.
- \*Passive panel in closed position.

### Springline™ Outswing Entry Door Dimensions and Specifications

Door Number	Door Dimensions				Min. Rough Opening			Clear Opening Sq. Ft./m <sup>2</sup>	Clear Opening Maximums			Vent Sq. Ft./m <sup>2</sup>	Overall Door Area Sq. Ft./m <sup>2</sup>
	Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	90° Width Inches/(mm)		Full Width Inches/(mm)	Height Inches/(mm)			
3068	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	15.01 (1.39)	33 1/8" (841)	35 1/8" (891)	61 5/8" (1565)	18.34 (1.70)	20.41 (1.90)	
3668	21 1/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.72 (1.55)	39 1/8" (994)	41 1/8" (1043)	58 5/8" (1489)	21.29 (1.98)	23.46 (2.18)	
3080	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.17 (1.69)	33 1/8" (841)	35 1/8" (891)	74 5/8" (1895)	21.50 (2.00)	23.81 (2.21)	
3680	21 1/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.42 (1.90)	39 1/8" (994)	41 1/8" (1043)	71 5/8" (1819)	25.00 (2.32)	27.40 (2.55)	
4080AP/PA	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.77 (2.12)	44 3/16" (1122)	48 1/8" (1222)	68 1/8" (1730)	29.04 (2.70)	31.56 (2.93)	
4080AP/PA*	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.88 (1.01)	21" (533)	23" (584)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)	
5080AP/PA	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.94 (2.41)	56 3/16" (1427)	60 1/8" (1527)	62 1/8" (1578)	35.74 (3.32)	38.46 (3.57)	
5080AP/PA*	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.51 (1.16)	27" (686)	29" (737)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)	
5480AP/PA	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.77 (2.49)	60 3/16" (1529)	64 1/8" (1629)	60 1/8" (1527)	37.92 (3.52)	40.72 (3.78)	
5480AP/PA*	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.94 (1.20)	29" (737)	31" (787)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)	
6080AP/PA	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.11 (2.61)	68 3/16" (1732)	72 1/8" (1832)	56 1/8" (1426)	42.23 (3.92)	45.15 (4.19)	
6080AP/PA*	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.64 (1.27)	33" (838)	35" (889)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)	
7080AP/PA	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.28 (2.72)	80 3/16" (2037)	84 1/8" (2137)	50 1/8" (1273)	48.50 (4.51)	51.62 (4.80)	
7080AP/PA*	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.27 (1.33)	39" (991)	41" (1041)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)	

- To complete door identification, add AESOD to "Door Number" listed in table (i.e. AESOD3068 or AESOD4080PA).
- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.
- \*Passive panel in closed position.